## What's new in **PolyWorks** 2023

Dimensional Analysis & Quality Control Solutions

> -1.138 -1.803

## Boost your large-scale 3D measurement performance with mixed reality display technology

Mixed reality display technologies are transforming large-scale metrology tasks by providing localized visual guidance, measurement feedback, and access to inspection functionalities, without encumbering the hands of operators. The PolyWorks<sup>®</sup> 2023 mixed reality app offers new powerful tools to guide laser scanning, review inspection results, and collaborate with colleagues:

### Position the hologram of the PolyWorks | Inspector™ 3D Scene window within your field of view to:

- See your scanning progression as a polygonal surface
- Perform additional scanning in areas of poor data quality
- Know exactly where to scan features and when enough data has been acquired for good feature extraction
- Review feature deviations and color maps directly over the measured piece following each measurement task

### Collaborate with colleagues anywhere:

- Call them through Microsoft Teams
- Review inspection results collaboratively by projecting holograms on the measured piece
- Discuss manufacturing issues efficiently by showing them defective areas

### innovmetric

Sequence Editor • 4 ×




## Simplify the project preparation and 3D measurement processes

### Set up measurement templates and perform 3D measurement tasks more efficiently.


Analyze and edit large measurement sequences more quickly by finding steps using keyword searches or navigating through step types, such as errors and warnings.


# circle 2 💽 circle 5



Replace the source objects of a dependent feature and preserve all related objects, data alignments,

and reports created from the feature.






circle 2



## Add flexibility to your GD&T toolbox

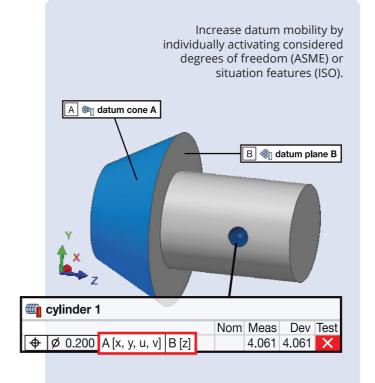


## Get the most out of CNC CMM measurements obtained by tactile scanning

Reduce the noise resulting from the manufacturing or measurement process by filtering tactile-scanned feature curves.

Reject outliers	
Outside of standard deviation factor:	2.500
O Percentage of points:	5.000
ctile scanning:	
Reject first points:	Traveled Distance 🗸
Distance:	1.000
Reject last points:	Traveled Distance 🗸
Distance:	1.000
Gaussian filter	
Wavelength:	10.000



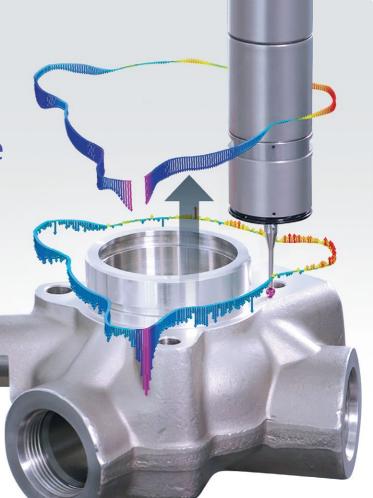




### Become a beta tester of our new intuitive ribbon menu!

Help us enhance the efficiency of your workflows

### In addition to celebrating the 30<sup>th</sup> anniversary of InnovMetric, 2024 will also be the debut year of the new PolyWorks ribbon menu. We are transforming your user experience so you can:

- Learn PolyWorks more quickly
- Remember your workflow and retrieve your favorite tools easily
- · Discover our powerful functionalities intuitively

With your help, we can make PolyWorks better. Stay tuned for our beta testing program announcement!

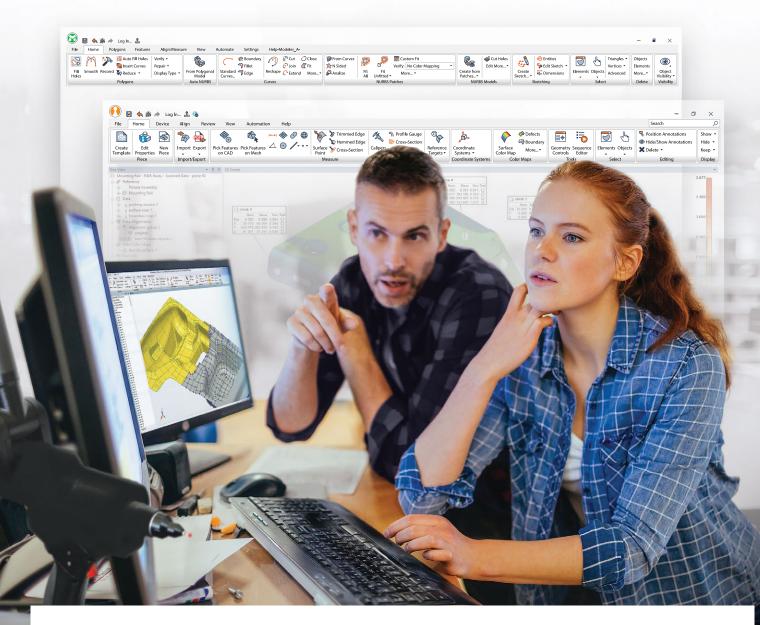

### Corporate Headquarters:

InnovMetric Software Inc. 1-418-688-2061 info@innovmetric.com © 2023 InnovMetric Software Inc. All rights reserved. PolyWorks<sup>1</sup> is a registered trademark of InnovMetric Software Inc. InnovMetric, PolyWorks [Inspector, PolyWorks] [Modeler, PolyWorks] [Taisman, PolyWorks [Reeveev, PolyWorks] [DatLoop, PolyWorks] Polit-0op, PolyWorks] AR, PolyWorks | ReportLoop, and "The Smart 3D Metrology Digital Ecosystem" are trademarks of InnovMetric Software Inc. SmartGDBAT is a trademark of Multi Metrics Inc. All other trademarks are the property of their respective owners.



Thailand Joint Venture Office:



#### PolyWork Software (Thailand) Co. Ltd

994 Luangphaeng Road, Tapyaow, Ladkrabang, Bangkok, 10520 Thailand Phone: +(66) 02-3647759 info@polyworksthailand.com | www.polyworksthailand.com